




Important Notice

In August 1, 2013, PABCO® Gypsum, a division of PABCO® building products, LLC acquired the QuietRock® business and operations from Serious Energy, Inc. Serious Energy, Inc. corporate structure and legal name changed through the years from Quiet Solution, Inc. to Serious Materials, Inc to Serious Energy, Inc. The acquisition of the QuietRock® business by PABCO® Gypsum includes the products, technical data, test reports and other intellectual property. For the avoidance of confusion, references to "Quiet Solution", "Serious Materials", or "Serious Energy" used within test reports, in general, should be understood as references to PABCO® Gypsum as of August 1, 2013.

ASTM E 90-09: Laboratory Measurement of Airborne Sound Transmission of Building Partitions and Elements

Orfield Laboratories Inc



Design Research Testing

Acoustics / Vibration / Vision / Lighting / Architecture / Market Research

TEST

Client: Serious Energy, Inc.
Report Date: January 13, 2012
Test Date: November 17, 2011
Test Number: OL 11-1110

ACCREDITATION



For the scope of accreditation under NVLAP code 200248-0

RESULT SUMMARY

STC=48

CLIENT ADDRESS

Serious Energy, Inc.
1250 Elko Drive
Sunnyvale, CA 94089
email: info@SeriousEnergy.com

PREPARED BY

David M. Berg
Orfield Laboratories, Inc.
2709 East 25th Street
Minneapolis MN 55406
Voice (612) 721-2455
FAX (612) 721-2457
e-mail dave@orfieldlabs.com

Prepared by:


ELECTRONICALLY REPRODUCED SIGNATURE

**David M. Berg
Laboratory Manager**

Reviewed by:


ELECTRONICALLY REPRODUCED SIGNATURE

Michael R. Role

Signatures are required on this document for an official laboratory test report. Copies of this document without signatures are for reference only.






Test Date November 17, 2011
Specimen Wall Assembly

Method ASTM Standard E90
Technician D. Berg

Single Number Rating
STC = 48

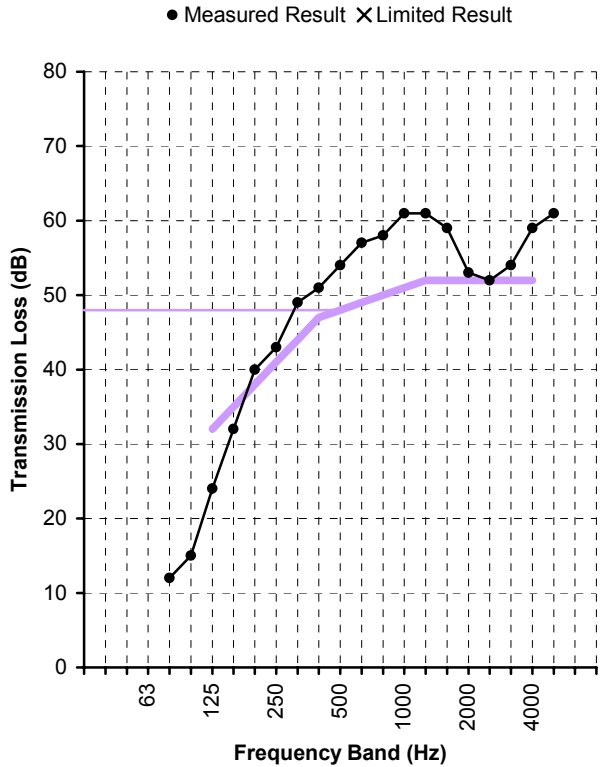

Freq. (Hz)	TL (dB)	Def. (dB)
80	12	
100	15	
125	24	8
160	32	3
200	40	-
250	43	-
315	49	-
400	51	-
500	54	-
630	57	-
800	58	-
1000	61	-
1250	61	-
1600	59	-
2000	53	-
2500	52	-
3150	54	-
4000	59	-
5000	61	-

Total Deficiencies 11

* Estimate of lower limit

Assembly Elements (listed in order from source room side to receiver room side)

- 0.625" (5/8") QuietRock ES (v); 1.25" type S12 screws @ 12" O.C.
- 3-5/8" 20 gauge (.0205") steel studs @ 16" O.C.
- 3-1/2" fiberglass insulation batts
- 0.625" (5/8") type X gypsum board (vs); 1.25" type S12 screws @ 12" O.C.





SPECIMEN DESCRIPTION

The specimen under test was a wall assembly. The elements in the assembly are described briefly below the results table and chart on page 2. Detailed information regarding the specimen may be found in Appendix C.

Test results pertain to this specimen only.

INSTALLATION AND DISPOSITION

The steel stud frame was originally constructed on November 17, 2011. The steel stud frame was retained from previous tests, and was used for subsequent tests in this series. The entire assembly was constructed by independent contractors. Qualified representatives of Orfield Laboratories observed the installation in progress, and visually inspected the specimen prior to testing.

TEST METHODS

The methods followed these published standards:

ASTM E90-09*: *Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements*

ASTM E413-10: *Classification for Rating Sound Insulation*

The values presented in this report are from single-direction transmission loss measurements.

** Orfield Laboratories, Inc. has been accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under their National Voluntary Laboratory Accreditation Program (NVLAP) for this test procedure. This report shall not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.*

CONFIDENTIALITY

The client has full control over this information and any release of information will be only to the client. The specific testing results are deemed to be confidential exclusively for the client's use. Reproduction of this report, except in full, is prohibited.





APPENDIX A: MEASUREMENT SETUP

Environment

Temperature	68°F [20.0°C]
Relative Humidity	50%

Specimen Area

Specimen Area	64.5 ft² [5.99 m²]
---------------	--------------------

Chamber Volume - Airborne Transmission

Source Room Volume	3284 ft³ [93.0 m³]
Receiving Room Volume	8281 ft³ [234.5 m³]

INSTRUMENTATION

Description	Brand	Model	S/N
Calibrator	Brüel & Kjær	Type 4230	1379712
Microphone	Brüel & Kjær	Type 4134	296819
Preamplifier	Brüel & Kjær	Type 2639	1202479
Microphone	Brüel & Kjær	Type 4134	1675265
Preamplifier	Brüel & Kjær	Type 2639	1312147
Power Supply	Brüel & Kjær	Type WB1057	n/a
Analyzer	Norsonic	Type 121	31185



APPENDIX B: CALCULATION RESULTS

Freq. Band (Hz)	Specimen T.L. (dB)	95% Conf. (dB)	Flanking Limit (dB)	STC Defic. (dB)
25				
31.5	29.3		40	
40	17.7		47	
50	16.7		43	
63	15.7		43	
80	12.4	±3.04	41	
100	14.9	±3.11	46	
125	24.3	±1.39	51	8
160	32.4	±1.22	55	3
200	39.8	±1.53	57	-
250	43.2	±1.70	60	-
315	48.5	±0.98	60	-
400	50.6	±0.99	61	-
500	53.7	±0.82	66	-
630	56.6	±0.69	68	-
800	58.1	±0.60	72	-
1000	60.7	±0.50	75	-
1250	61.4	±0.56	72	-
1600	58.7	±0.44	73	-
2000	52.8	±0.35	77	-
2500	51.7	±0.63	81	-
3150	54.1	±0.58	84	-
4000	58.6	±0.47	78	-
5000	61.4			
6300	65.0			
8000	68.6 *			
10000	65.7 *			
Total deficiencies below STC contour (dB)				11
STC contour [ASTM E413]				48

* Actual transmission loss of specimen may be higher than measured at this frequency band. Signal-to-noise in the receiving room less than 5 dB, therefore the result is "an estimate of the lower limit".

Note: 95% confidence intervals from room qualification data. Flanking Limit from chamber flanking study. Reference sample and repeatability data available upon request. Extended frequency results below 80Hz and above 5000Hz are for reference only.





APPENDIX C: SPECIMEN ASSEMBLY DESCRIPTION

The following table shows the elements in the wall assembly in order from the source room to receiving room. Independent contractors constructed and installed the wall assembly in the laboratory test opening. A qualified representative of Orfield Laboratories observed the installation in process and visually inspected the completed specimen and seals. All materials were weighed prior to installation. Fastener weights are not included in the reported weights.

Overall Mass = 365.8 lb [165.9 kg]

Overall Surface Density = 5.67 PSF [27.69 kg/m²]

Element	Mass lb [kg]	Surf. Dens. PSF [kg/m ²]
0.625" (5/8") QuietRock ES (v); 1.25" type S12 screws @ 12" O.C.	175.0 [79.4]	2.71 [13.25]
3-5/8" 20 gauge (.0205") steel studs @ 16" O.C.	34.0 [15.4]	0.53 [2.57]
3-1/2" fiberglass insulation batts	13.8 [6.3]	0.21 [1.04]
0.625" (5/8") type X gypsum board (vs); 1.25" type S12 screws @ 12" O.C.	143.0 [64.9]	2.22 [10.82]

The QuietRock ES (EZ-SNAP) noise reducing drywall and QuietSeal Pro acoustical sealant were supplied by the Client. All other materials were purchased through independent retail suppliers and were acquired by the independent construction contractors. The frame and insulation were constructed for previous tests in this series for this client, and portions of this specimen assembly were used in subsequent tests in the series.

FRAMING

A 3-5/8", 20-gauge (.0205") steel frame was constructed in the perimeter of the laboratory test specimen opening. The frame consisted of 20-gauge (.0205") steel, 3-5/8" x 1-1/4" track plate at the top and bottom, and seven, 3-5/8" x 1-1/4", 20-gauge (.0205") steel studs installed, 16" on center. The track plates and studs were fastened together with two type S pan head screws at each intersection. The perimeter of the frame was sealed to the specimen opening with QuietSeal Pro acoustical sealant.

INSULATION

Fiberglass insulation batts were installed in the stud cavities. The insulation batts were 16" wide, 3-1/2" thick (R13) and were friction fit into each of the six stud cavities. Figure 1 is a photograph of the insulated frame before the installation of the sheeting layers.



Figure 1: Insulated steel stud frame viewed from receiving room side

SHEETING

The single source room side sheeting layer consisted of two 5/8" thick 4' by 8' sheets of QuietRock ES (EZ-SNAP) noise reducing drywall. The QuietRock ES sheets were fastened parallel to the steel stud frame with 1-1/4" long, type S12 drywall screws spaced at 12" on center. The single layer was comprised of two complete 4' by 8' sheets. Figure 2 is a photograph of the source side sheeting.



Figure 2: Source room side QuietRock ES installed and sealed in the specimen opening



The single receiving room side sheeting layer consisted of two 5/8" thick 4' by 8' sheets of type X gypsum panels. The type X gypsum sheets were fastened parallel to the steel stud frame with 1-1/4" long, type S12 drywall screws spaced at 12" on center. On the receiving room side the sheeting was comprised of three sections to provide seams that were staggered from those on the source side. Figure 3 is a photograph of the receiving room side sheeting.



Figure 3: Receiving room side sheeting installed and sealed in the specimen opening

Panels were shimmed at installation so equal gaps were at the top and bottom. Gaps were less than 1/4" in all cases. Shims were removed after sheeting was fastened and the vertical seams were sealed on the source and receiving room sides with QuietSeal Pro acoustical sealant and 1-7/8" wide, 5 mil aluminum foil tape. The perimeter of both sides of the sample were sealed with QuietSeal Pro acoustical sealant, 5 mil aluminum foil tape and 7/8" dense putty tape.



APPENDIX D: SINGLE-NUMBER CALCULATION TO ISO 717-1

Freq. Band (Hz)	R_i ($R_i \equiv TL$) (dB)	Ref Curve (dB)	Unfav. Deviat. (dB)	L_{i1} Spectrum (dB)	$L_{i1} - R_i$ Level (dB)	L_{i2} Spectrum (dB)	$L_{i2} - R_i$ Level (dB)
50	16.7						
63	15.7						
80	12.4						
100	14.9	30	15.1	-29.0	-43.9	-20.0	-34.9
125	24.3	33	8.7	-26.0	-50.3	-20.0	-44.3
160	32.4	36	3.6	-23.0	-55.4	-18.0	-50.4
200	39.8	39	-	-21.0	-60.8	-18.0	-57.8
250	43.2	42	-	-19.0	-62.2	-15.0	-58.2
315	48.5	45	-	-17.0	-65.5	-14.0	-62.5
400	50.6	48	-	-15.0	-65.6	-13.0	-63.6
500	53.7	49	-	-13.0	-66.7	-12.0	-65.7
630	56.6	50	-	-12.0	-68.6	-11.0	-67.6
800	58.1	51	-	-11.0	-69.1	-9.0	-67.1
1000	60.7	52	-	-10.0	-70.7	-8.0	-68.7
1250	61.4	53	-	-9.0	-70.4	-9.0	-70.4
1600	58.7	53	-	-9.0	-67.7	-10.0	-68.7
2000	52.8	53	0.2	-9.0	-61.8	-11.0	-63.8
2500	51.7	53	1.3	-9.0	-60.7	-13.0	-64.7
3150	54.1	53	-	-9.0	-63.1	-15.0	-69.1
4000	58.6						
5000	61.4						
Sum =			28.9	$R_{A,1} =$	42.4	$R_{A,2} =$	34.2
$R_w =$			49	$C =$	-7	$C_{tr} =$	-15

$$R_w (C ; C_{tr}) = 49 (-7 ; -15)$$

$$R_w (C ; C_{tr} ; C_{50-3150} ; C_{tr, 50-3150}) = 49 (-7 ; -15 ; -9 ; -19)$$

$$R_w (C ; C_{tr} ; C_{100-5000} ; C_{tr, 100-5000}) = 49 (-7 ; -15 ; -6 ; -15)$$

$$R_w (C ; C_{tr} ; C_{50-5000} ; C_{tr, 50-5000}) = 49 (-7 ; -15 ; -8 ; -19)$$

Note: The calculations in ISO 717-1 are performed based on assumed equivalency of the ASTM and the corresponding ISO test methods. The test herein is performed according to the ASTM standards. Orfield Laboratories *does not* hold accreditation for ISO 140 or ISO 717 under their NVLAP scope of accreditation.

The spectrum adaptation terms C and C_{tr} characterize performance against two specific sound sources, A-weighted pink noise and A-weighted traffic noise respectively. The standard ISO 717-1 includes a discussion of "Use of Spectrum Adaptation Terms" in Annex A (informative).

Each spectrum adaptation term may additionally be reported with extended frequency bands included. A calculation for the primary frequency range is shown above, but all available extended-frequency calculations were performed to compare against corresponding ratings of other specimens

