


Acoustic Data			
Test Site:	North Orbit Acoustic Laboratories P.O. Box 6948 Minneapolis, MN 55406-0948	Test Number:	NOAL 18-0637
Assembly Type:	Wall	Test Date:	6/8/2018
Method:	ASTM E90-09	Report Date:	8/29/2018

Frequency (Hz)	TL (dB)	Deficiencies (dB)
80	13	
100	18	
125	26	8
160	31	6
200	36	4
250	43	
315	48	
400	52	
500	56	
630	59	
800	61	
1000	63	
1250	64	
1600	66	
2000	62	
2500	57	
3150	58	
4000	63	
5000	66	
<b>Total Deficiencies</b>		<b>18</b>






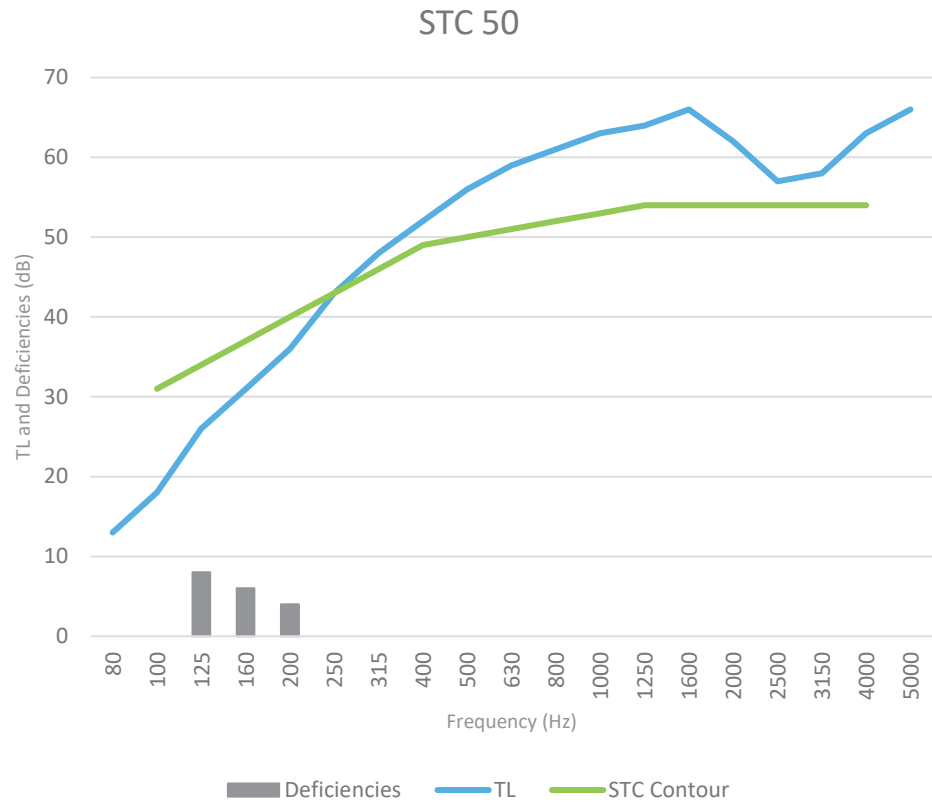





Assembly Mass		
Building Element	Mass lb (kg)	Surface Weight PSF (kg/m2)
5/8" Flame Curb® Type X gypsum panel	198.8 (90.2)	2.07 (10.11)
Resilient channels 24" oc	12.8 (5.8)	0.13 (0.65)
3-5/8" 54 mil (16 ga.) steel studs spaced 16" oc	138.8 (63.0)	1.45 (7.06)
3-1/2" glass fiber insulation	21.4 (9.7)	0.22 (1.09)
5/8" QuietRock® ES Type X gypsum panel	254.6 (115.5)	2.65 (12.95)
<b>Total</b>	<b>626.40 (284.13)</b>	<b>6.53 (31.86)</b>

**Test Methods**

Test methods follow the published standards listed below. All values derived for single-direction transmission loss measurements.

ASTM E90-09: Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.  
ASTM E413-16: Classification for Rating Sound Isolation

Design Details	Description	Acoustical	Fire
<p><b>PGD-01-10-265</b></p> 	<ul style="list-style-type: none"> <li> 1-1/4" Type S drywall screws spaced 8" o.c. at edges and 12" o.c. in the field.</li> <li> One Layer 5/8" QuietRock<sup>®</sup> ES or QuietRock<sup>®</sup> ES MR type X gypsum panel applied vertically.</li> <li> 3-5/8" 54 mil (16 ga.) steel studs, 16" o.c.</li> <li> 3-1/2" glass fiber insulation in stud space.</li> <li> Resilient channel applied at right-angle, 24" o.c.</li> <li> 1/2" Type S screws attaching resilient channel to stud at each intersection.</li> <li> One layer 5/8" type X (FLAME CURB<sup>®</sup>, MOLD CURB<sup>®</sup> Plus, ABUSE CURB<sup>®</sup>, PABCO<sup>®</sup> High Impact, PABCO<sup>®</sup> Glass Sheathing or PABCO<sup>®</sup> Gypsum Sheathing) gypsum panel applied vertically.</li> <li> 1" Type S drywall screws spaced and 12" o.c.</li> </ul>	<p><b>STC 50</b> NOAL 18-0637</p>	<p><b>1 Hour</b> UL U425</p>
<p>5-3/8" Thick, 6.6 lb/ft<sup>2</sup>, Non-Load Bearing.</p>	<p>Vertical joints staggered on opposite sides.</p>		