



Important Notice

In August 1, 2013, PABCO® Gypsum, a division of PABCO® building products, LLC acquired the QuietRock® business and operations from Serious Energy, Inc. Serious Energy, Inc. corporate structure and legal name changed through the years from Quiet Solution, Inc. to Serious Materials, Inc to Serious Energy, Inc. The acquisition of the QuietRock® business by PABCO® Gypsum includes the products, technical data, test reports and other intellectual property. For the avoidance of confusion, references to "Quiet Solution", "Serious Materials", or "Serious Energy" used within test reports, in general, should be understood as references to PABCO® Gypsum as of August 1, 2013.

TEST REPORT

FOR: Quiet Solution, LLC
Sunnyvale, CA

Sound Transmission Loss Test
RAL™-TL07-022

ON: ID 02: QuietRock 510, 24" on Center Wood Stud Wall
with R-13 Fiberglass and QuietRock 510

Page 1 of 4

CONDUCTED: 23 January 2007

TEST METHOD

Unless otherwise designated, the measurements reported below were made with all facilities and procedures in explicit conformity with the ASTM Designations E90-04 and E413-04, as well as other pertinent standards. Riverbank Acoustical Laboratories has been accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) for this test procedure (NVLAP Lab Code: 100227-0). A description of the measuring technique is available separately.

DESCRIPTION OF THE SPECIMEN

The test specimen was designated by the client as ID 02: QuietRock 510, 24" on center wood stud wall with R-13 fiberglass and QuietRock 510. The overall dimensions of the specimen as measured were nominally 2.46 m (97 in.) wide by 2.74 m (108 in.) high and 117 mm (4.625 in.) thick. The specimen was installed by the client directly into the laboratory's 2.74 m (9 ft) by 4.27 m (14 ft) wood-lined steel frame. A substantial filler wall was used in the remaining open area. Both the filler wall and test specimen were sealed on the periphery (both sides) with dense mastic.

The description of the specimen was as follows: The wall consisted of a 2 x 4 wood stud wall with R-13 fiberglass batt insulation. Both sides of the wall were finished with QuietSolutions QR 510. A more detailed description of the wall assembly appears in the sections below.

Floor Ceiling Plates, Studs and Insulation: The wall had two 89 mm (3.5 in.) wide by 38 mm (1.5 in.) thick and 2.44 m (96 in.) long SPF wood plates. Plates were attached to the top and bottom of the test frame with 12d nails on 610 mm (24 in.) centers. Five (5) 89 mm (3.5 in.) wide by 38 mm (1.5 in.) thick and 2.67 m (105 in.) long SPF wood studs spaced on 610 mm (24 in.) centers were attached to the floor and ceiling plates with 12d nails. The total weight of the wood used was 28 kg (61 lbs). All cavities formed by the plates and studs were lined with Kraft faced R-13 fiberglass insulation measuring 89 mm (3.5 in.) thick. The total weight of the insulation was 8.2 kg (18 lbs).

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



TEST REPORT

Quiet Solution, LLC

RAL™-TL07-022

23 January 2007

Page 2 of 4

Gypsum Wallboard: On both sides, a layer of 13 mm (0.5 in.) thick QR 510 board was applied vertically to the studs. The boards were attached to the studs with #6, 41 mm (1.625 in.) long bugle head drywall screws at 406 mm (16 in.) on centers. Total weight of the QR 510 board as measured was 141 kg (312 lbs.). All joints and seams were staggered for each board layer application. Joints were sealed with QuietSeal 350 (QS 350) acoustical caulk and metal taped. Screw heads remained exposed.

The weight of the specimen as measured was 177.2 kg (390.75 lbs.), an average of 26.2 kg/m² (5.4 lbs/ft²). The transmission area used in the calculations was 6.7 m² (72.5 ft²). The source and receiving room temperatures at the time of the test were 19±2°C (67±2°F) and 51±2% relative humidity. The source and receive reverberation room volumes were 178 m³ (6,298 ft³) and 177 m³ (6,255 ft³), respectively.

This report shall not be reproduced except in full, without the written approval of RAL.

THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.



NVLAP Lab Code 100227-0

ACCREDITED BY DEPARTMENT OF COMMERCE, NATIONAL VOLUNTARY LABORATORY
ACCREDITATION PROGRAM FOR SELECTED TEST METHODS FOR ACOUSTICS.
THE LABORATORY'S ACCREDITATION OR ANY OF ITS TEST REPORTS IN NO WAY CONSTITUTES
OR IMPLIES PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY NIST.

TEST REPORT

Quiet Solution, LLC

RAL™-TL07-022

23 January 2007

Page 3 of 4

TEST RESULTS


Sound transmission loss values are tabulated at the eighteen standard frequencies. A graphic presentation of the data and additional information appear on the following pages. The precision of the TL test data is within the limits set by the ASTM Standard E90-04.


<u>FREQ.</u>	<u>T.L.</u>	<u>C.L.</u>	<u>DEF.</u>	<u>FREQ.</u>	<u>T.L.</u>	<u>C.L.</u>	<u>DEF.</u>
100	22	1.12		800	53	0.13	1
125	30	0.72	6	1000	55	0.14	
160	31	0.49	8	1250	56	0.13	
200	36	0.44	6	1600	57	0.11	
250	42	0.33	3	2000	59	0.11	
315	45	0.31	3	2500	61	0.06	
400	49	0.32	2	3150	62	0.05	
500	51	0.18	1	4000	63	0.08	
630	52	0.14	1	5000	61	0.05	

STC=52

ABBREVIATION INDEX

FREQ. = FREQUENCY, HERTZ, (cps)
T.L. = TRANSMISSION LOSS, dB
C.L. = UNCERTAINTY IN dB, FOR A 95% CONFIDENCE LIMIT
DEF. = DEFICIENCIES, dB<STC CONTOUR (SUM OF DEF = 31)
STC = SOUND TRANSMISSION CLASS


Tested by 
Dean Victor
Senior Experimentalist

Approved by 
David L. Moyer
Laboratory Manager

This report shall not be reproduced except in full, without the written approval of RAL.
THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.

TEST REPORT

**SOUND TRANSMISSION REPORT
RAL - TL07-022**

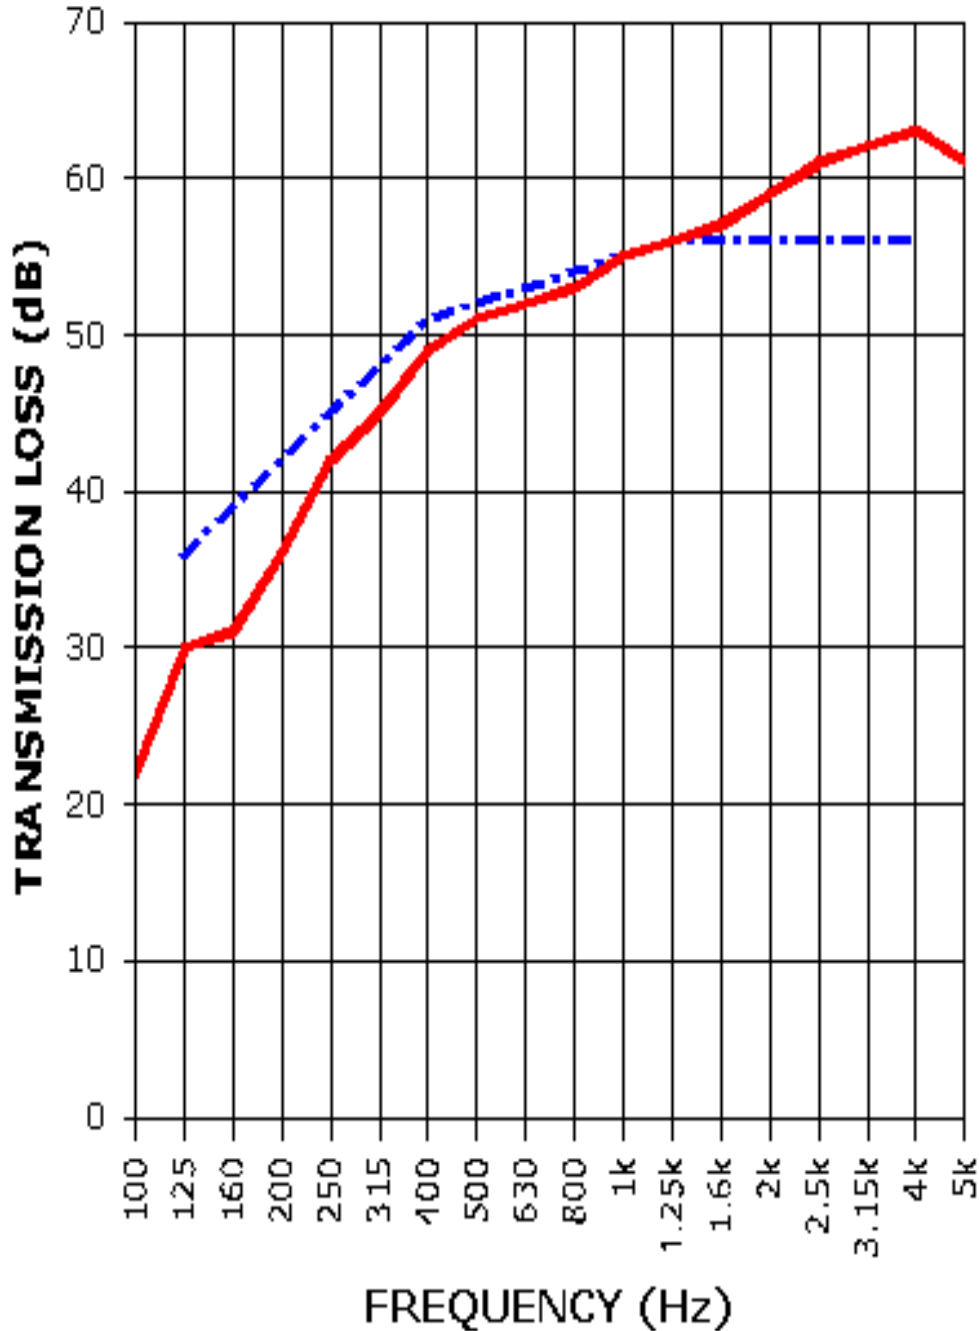

STC= 52



TRANSMISSION LOSS
SOUND TRANSMISSION LOSS CONTOUR

This report shall not be reproduced except in full, without the written approval of RAL.
THE RESULTS REPORTED ABOVE APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR MEASUREMENT. NO RESPONSIBILITY IS ASSUMED FOR PERFORMANCE OF ANY OTHER SPECIMEN.

